


FLOOR STANDING UNIT


Block Cold Draft

The floor standing unit can block cold drafts from windows to provide a warmer environment for places such as libraries and offices.

Without Floor Standing

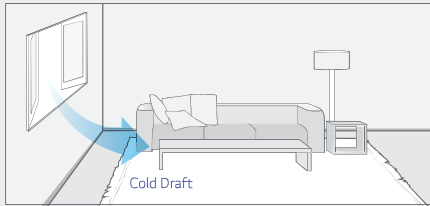


With Floor Standing

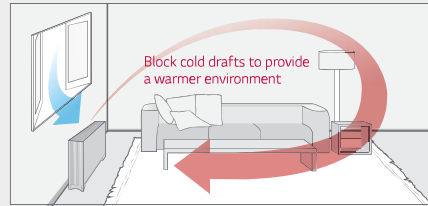


3 Way Flexible Installation

It is possible to install and connect the outdoor unit in 3 different ways (Side, Back, Floor).

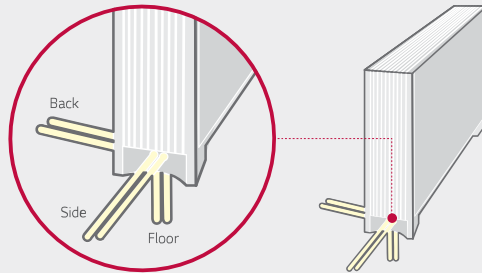


Sliding Type Filter

Easy maintenance and extended product life with sliding type filter.



Easy cleaning

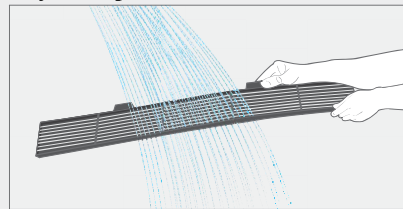

FLOOR STANDING UNIT

ARNU07GCE*4 / ARNU09GCE*4 / ARNU12GCE*4
ARNU15GCE*4 / ARNU18GCF*4 / ARNU24GCF*4



A Floor standing with case



U Floor standing without case

| Model | Independent Unit | | ARNU07G *4 | ARNU09G *4 | ARNU12G *4 | ARNU15G *4 | ARNU18G *4 | ARNU24G *4 |
|-------------------|-------------------|---------------------|-----------------------------------|--|--|--|--|--|
| Capacity | Cooling | Nom | kW | 2.2 | 2.8 | 3.6 | 4.5 | 5.6 |
| | Heating | Nom | kW | 2.5 | 3.2 | 4.0 | 5.0 | 6.3 |
| Power Input | Cooling / Heating | Nom ¹⁾ | W | 24 | 30 | 36 | 44 | 84 |
| | Cooling / Heating | Rated ²⁾ | W | 85 | 85 | 85 | 85 | 115 |
| Power Supply | | | Ø / V / Hz | 1 / 220-240 / 50 1 / 220 / 60 | 1 / 220-240 / 50 1 / 220 / 60 | 1 / 220-240 / 50 1 / 220 / 60 | 1 / 220-240 / 50 1 / 220 / 60 | 1 / 220-240 / 50 1 / 220 / 60 |
| | Airflow Rate | Cooling | H / M / L m ³ / min | 8.5 / 7.5 / 6.5 | 9.5 / 8.5 / 7.5 | 10.5 / 9.5 / 8.5 | 11.5 / 10.0 / 9.5 | 16.0 / 14.0 / 12.0 |
| | | Heating | H / M / L m ³ / min | 8.5 / 7.5 / 6.5 | 9.5 / 8.5 / 7.5 | 10.5 / 9.5 / 8.5 | 11.5 / 10.0 / 9.5 | 16.0 / 14.0 / 12.0 |
| Sound Pressure | | | H / M / L dBA | 35 / 33 / 31 | 36 / 34 / 32 | 37 / 35 / 33 | 38 / 37 / 35 | 40 / 37 / 34 |
| Sound Power | | | H / M / L dBA | 54 / 52 / 50 | 55 / 54 / 52 | 57 / 55 / 54 | 59 / 57 / 55 | 60 / 57 / 54 |
| Dimensions | Body | W x H x D | mm | 1,067 x 635 x 203 (A) 978 x 639 x 190 (U) | 1,067 x 635 x 203 (A) 978 x 639 x 190 (U) | 1,067 x 635 x 203 (A) 978 x 639 x 190 (U) | 1,067 x 635 x 203 (A) 978 x 639 x 190 (U) | 1,345 x 635 x 203 (A) 1,256 x 639 x 190 (U) |
| | | | | Net Weight ³⁾ | kg | 27.0 (A) / 20.0 (U) | 27.0 (A) / 20.0 (U) | 27.0 (A) / 20.0 (U) |
| Piping Connection | | Liquid | mm | 6.35 | 6.35 | 6.35 | 6.35 | 9.52 |
| | | Gas | mm | 12.7 | 12.7 | 12.7 | 12.7 | 15.88 |
| | | Drain | LD | mm | 12.0 | 12.0 | 12.0 | 12.0 |

* This product contains Fluorinated Greenhouse Gases: (R410A)

1) Nom. Performance tested under EN14511

2) Rated -1: Max power input allowed for fan motor

3) Floor standing with case (without case)

Note: 1. Capacities are based on the following conditions

- Cooling: Indoor temp. 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor temp. 35°C (95°F) DB / 24°C (75.2°F) WB, Interconnecting piping length 7.5m, Level difference of zero

+ Heating: Indoor temp. 20°C (68°F) DB / 15°C (59°F) WB, Outdoor temp. 7°C (44.6°F) DB / 6°C (42.8°F) WB, Interconnecting piping length 7.5m, Level difference of zero

2. Due to our policy of innovation some specifications may be changed without notification

3.LD: "Internal Diameter"

Accessories

| Model | ARNU07G *4 | ARNU09G *4 | ARNU12G *4 | ARNU15G *4 | ARNU18G *4 | ARNU24G *4 |
|---------------------------|--|------------|------------|------------|------------|------------|
| Dry Contact | Simple (1 Contact point with case) | | | PDRCB000 | | |
| | 2 Contact point | | | PDRCB400 | | |
| | For Thermostat (On-Off / Mode / Fan speed) | | | PDRCB300 | | |
| | Modbus Communication | | | PDRCB500 | | |
| EEV Kit for MULTIV indoor | | | | PRGK024A0 | | |
| IR Receiver | | | PWLRVN000 | | | |

Wired Remote Controller

| Premium | Standard II | | Simple | Simple for Hotel | Wireless Remote Controller |
|---------------------------------------|-------------------|-------------------|---|---|----------------------------|
| | | | | | |
| PREMTA000 PREMTA000A PREMTA000B | PREMTB001 (White) | PREMTB001 (Black) | PQRCVCL0Q (Black) PQRCVCL0QW (White) | PQRCHCA0Q (Black) PQRCHCA0QW (White) | PQWRHQFDB |