

High-wall Type (3 series)

Elegant and slim

This classic high-wall unit is elegant and slim; it can easily blend in with any room interior.


Total comfort is granted, thanks also to the 70° directional auto-swing louver that provide uniform air distribution.




Remote controller

MMK-AP***3H1

MMK-AP0073H1 to AP0243H1

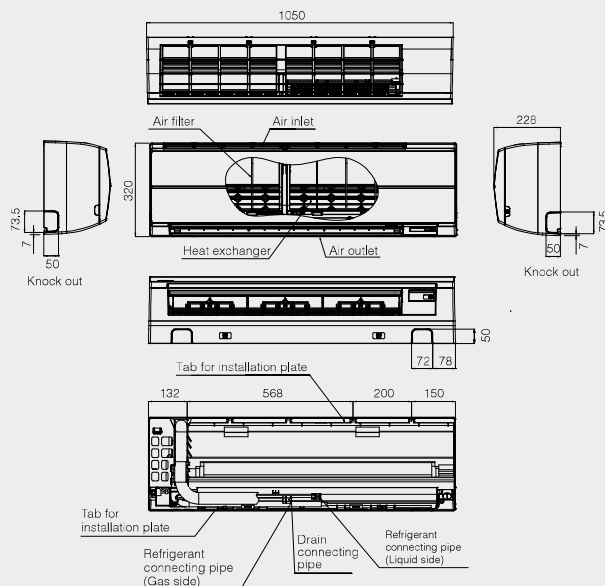

● Space required for installation and servicing



Technical specifications

Model name	MMK-	AP0073H1	AP0093H1	AP0123H1	AP0153H1	AP0183H1	AP0243H1
Cooling/Heating capacity*1	(kW)	2.2/2.5	2.8/3.2	3.6/4.0	4.5/5.0	5.6/6.3	7.1/8.0
Electrical characteristics	Power requirements	1-phase 50Hz 230V (220-240V) (Separate power supply for indoor units is required.)					
	Power consumption	(kW)	0.018	0.021		0.043	0.050
External dimensions	Height	(mm)	320				
	Width	(mm)	1050				
	Depth	(mm)	228				
Total weight	(kg)	15					
Fan unit	Standard air flow (High/Mid/Low)	(m ³ /h)	570/450/390	600/480/390	840/660/540	1020/750/570	
	Motor output	(W)	30				
Connecting pipe	Gas side	(mm)	ø9.5		ø12.7		ø15.9
	Liquid side	(mm)	ø6.4				ø9.5
	Drain port (nominal dia.)		16 (polyvinyl chloride tube)				
Sound pressure level*2 (High/Mid/Low)	(dB(A))	35/31/28	37/32/28	41/36/33	46/39/34		
Sound power level (High/Mid/Low)	(dB(A))	50/46/43	52/47/43	56/51/48	61/54/49		

Note 1 : The capacities are measured under the conditions specified by JIS B 8615 based on the reference piping.

The reference piping consists of 5 m of main piping and 2.5 m of branch piping connected with 0 m height.

Note 2 : The sound level are measured in an anechoic chamber in accordance with JIS B 8616.

Normally, the values measured in the actual operating environment become larger than the indicated values due to the effects of external sound.

Note : Rated conditions Cooling : Indoor air temperature 27°C DB/19°C WB, Outdoor air temperature 35°C DB.

Heating : Indoor air temperature 20°C DB, Outdoor air temperature 7°C DB/6°C WB.